


Hi-Flo T-Series

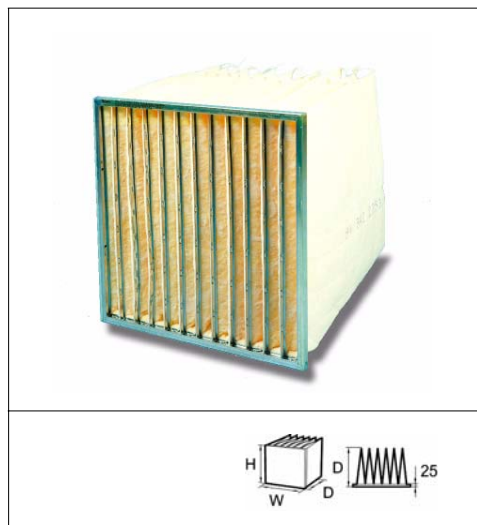

Advantages

- Large surface area
- Ultra compact
- Low pressure drop
- Controlled media spacing (CMS)
- High dust holding capacity

Application: Air conditioning applications.

Type: Compact multi-pocket bag filter.

Case: Galvanised steel.

Media: Glass Fibre.

EN 779:2002 efficiency: F6 (55-65%), F7 (80-85%), F8/9 (90-95%).

Eurovent 4/5 efficiency: EU6, EU7, EU8.

Recommended final pressure drop: 450 Pa (suggested economical change point 250 Pa).

Temperature: 70°C maximum in continuous service.

Holding frames: Front and side access housings and frames are available, Type 8, Type L, and FC Housings.



Model	Dimensions (WxHxD)	Filter classification EN 779:2002	Number of pockets	Media area m ²	Air flow/pressure drop m ³ /hr/Pa	Unit weight kg	Unit volume m ³
*TM6	592x592x380	F6	12	5.5	3400/90	2.3	0.05
TN6	490x592x380	F6	10	4.5	2800/90	2.2	0.05
TO6	287x592x380	F6	6	2.7	1700/90	1.4	0.03
TM7	592x592x380	F7	12	5.5	3400/130	2.3	0.05
TN7	490x592x380	F7	10	4.5	2800/130	2.1	0.05
TO7	287x592x380	F7	6	2.7	1700/130	1.4	0.03
TM9	592x592x380	F8/9	12	5.5	3400/205	2.3	0.05
TN9	490x592x380	F8/9	10	4.5	2800/205	2.0	0.05
TO9	287x592x380	F8/9	6	2.7	1700/205	1.4	0.03

Other sizes are available on request - *Supplied with a 25mm header frame as standard. 20mm header available on request.

As part of our continuous improvement, Camfil Farr reserve the right to change specifications without notice.