


Ecopleat ECO

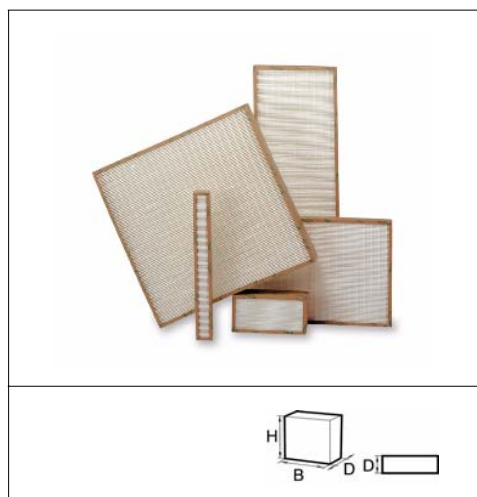

Avanatges

- Ultra compact
- Full-combustible
- Large surface area
- Long operating life
- High dust holding capacity
- Less frequent changes

Application: Air conditioning or industrial processing systems and for mini air conditioning systems, individual modules, ventilation equipment.

Type: High efficiency compact filter.

Frame: Water resistant cardboard.

Media: Wet-laid glass fibre paper.

Separator: Hot melt glue.

Sealant: Polyurethane.

EN 779:2002 filter class: F6, F7, F8.

ASHRAE 52.2:1999 filter class: MERV 11, MERV 13, MERV 14.

Recommended final pressure drop: 350 Pa.

Temperature: 70°C.

Relative humidity: 100% RH.

Artikelnummer	Modell	Dimensioner (BxHxD) mm	Filterklass enligt EN779:2002	Luftflöde / Tryckfall m ³ /h / Pa	Filteryta m ²	Enhetsvikt kg	Enhetsvolym m ³	Energi-klass
304188	3GPF	287x592x48	F5	950/ 55	2,80	2	0,01	E
303929	3GPF	592x592x48	F5	1900/ 50	5,30	3	0,02	E
303330	3GPF	287x592x48	F6	950/ 65	2,80	2	0,01	D
303879	3GPF	592x592x48	F6	1900/ 60	5,30	3	0,02	D
304137	3GPF	287x592x48	F7	950/ 90	2,90	2	0,01	B
302131	3GPF	592x592x48	F7	1900/ 90	5,80	3	0,02	B
304037	3GPF	287x592x48	F8	950/120	3,30	2	0,01	C
302116	3GPF	592x592x48	F8	1900/110	6,40	3	0,02	C
304081	3GPF	287x592x96	F5	1700/ 80	4,70	3	0,02	C
302505	3GPF	592x592x96	F5	3400/ 90	9,30	4	0,04	C
303726	3GPF	287x592x96	F6	1700/ 90	4,70	3	0,02	D
303715	3GPF	592x592x96	F6	3400/ 90	9,30	4	0,04	D
303355	3GPF	287x592x96	F7	1700/110	5,10	3	0,02	B
302350	3GPF	592x592x96	F7	3400/110	10,2	4	0,04	B
303331	3GPF	287x592x96	F8	1700/150	5,80	3	0,02	B
302383	3GPF	592x592x96	F8	3400/150	11,6	4	0,04	B

Andra dimensioner finns för leverans

Ecopleat G B x H x D - FK

B = Bredd 100 - 1000 mm med 5 mm intervall (t.ex. 105, 110, 115 etc.)

H = Höjd 100 - 610 mm med 5 mm intervall (t.ex. 105, 110, 115 etc.)

D = Djup 25 - 130 mm med 5 mm intervall (t.ex. 30, 35, 40 etc.)

FK = Filterklass F5, F6, F7, F8

Exempel: 610x610x50-F8