


CamSure

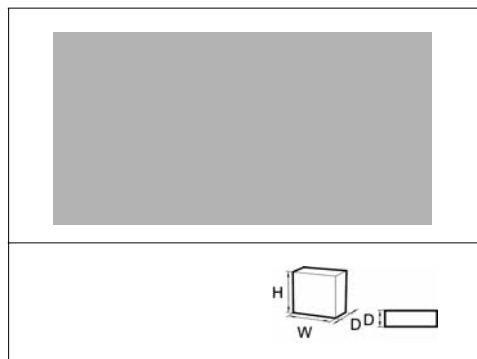

Advantages

- Range of standard and non standard sizes
- High performance
- Suitable for a wide range of air volumes

Application: Adsorption of odours and gases in air conditioning applications.

Type: Loose fill adsorbent panels.

Frame: Galvanised steel.

Media: Campure or activated carbon based materials.

Temperature: 40°C maximum in continuous service.

Recommended relative humidity: 30 - 70%.

Mounting systems: Front and side access housings and frames are available.

Items

| Reference | Model | Dimensions (WxHxD) mm | Air flow / pressure drop m ³ /hr/Pa | Unit weight (kg) | Unit volume m ³ |
|-----------|---------------|-----------------------|--|------------------|----------------------------|
| 5100003 | RS80-D-LGS048 | 594 x 594 x 47 | 850/70 | 7.5 | 0.017 |
| 5100004 | RS80-D-LGS048 | 594 x 289 x 47 | 425/70 | 4 | 0.0083 |

Above are sample sizes, filters are available in a comprehensive range of sizes, please specify.

Also available with stainless steel case.