


Absolute 1FRK

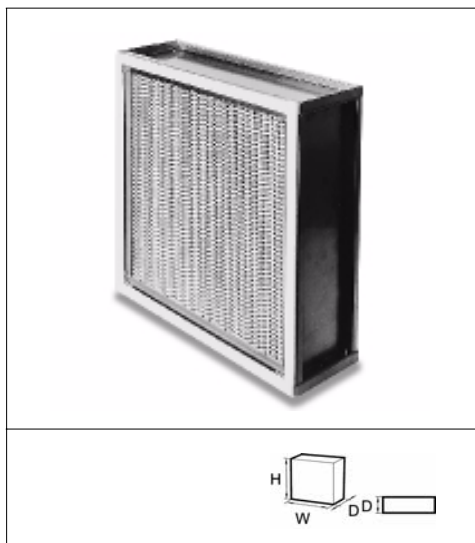

Advantages

- 99.97% DOP
- High temperature resistant (up to 350°C)

Application: Protection of ultra-clean processes at high temperatures.

Frame: Stainless steel.

Gasket: Glass fibre.

Media: Glass fibre paper.

Separator: Aluminium.

Sealant: Ceramic, glass fibre.

DOP efficiency: 99.97% .

Temperature: 350°C in continuous service (400°C peak).

Model	Dimensions (WxHxD) mm	Filter classification EN 1822	Media area m ²	Air flow/nominal pressure drop m ³ /h/Pa	Unit weight kg	Unit volume m ³
1FRK-220-10	305x610x150	99.97	5.1	580/250	6	0.04
1FRK-300-10	457x457x150	99.97	6.8	1125/250	8	0.05
1FRK-150-10	457x610x150	99.97	8.0	900/250	10	0.07
1FRK-600-10	610x610x150	99.97	11.0	1245/250	12	0.07
1FRK-980-01	914x610x150	99.97	16.8	1925/250	16	0.11
1FRK-450-01	305x610x150	99.97	10.4	950/250	9	0.06
1FRK-725-01	610x457x292	99.97	16.4	1500/250	13	0.08
1FRK-1250-01	762x610x292	99.97	28.4	2625/250	21	0.17
1FRK-1000-01	610x610x292	99.97	22.5	2050/250	17	0.12