


## CamContain C

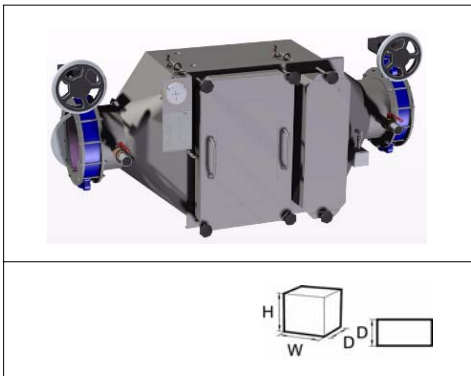

### Advantages

- Welded housings with integrated transitions
- Comes equipped with gas tight dampers with various drives
- Standard gas decontamination port
- Fully or semi-automatic scanner available for leak tests
- Contact-free filter change-out
- Automatic tension-regulating filter-clamping device
- Fast and secure filter installation, lever-operated
- Filter seating test according to DIN 1946, Part 4
- Tightness Class B according to EN 1866 at 5000 Pa
- Connecting pieces can be supplied in various designs
- Available in a powder-coated or stainless-steel finish